



PN10 PN16 PN25 Water Valve Ductile Iron GG25 GGG40 GGG50 Lug Butterfly Valves

Our Product Introduction

Basic Information

- Place of Origin: CHINA
- Brand Name: DEYE
- Certification: ISO9001:2015 PED
- Model Number: DY-BFV-1005
- Minimum Order Quantity: 10PCS
- Price: USD2-USD20000 each
- Packaging Details: carton box+ ply wooden cases or carton+ Pallets
- Delivery Time: 20 days for usual order, 7 days for stocked items
- Payment Terms: T/T, L/C, D/P
- Supply Ability: 1000pcs one month



Product Specification

- Highlight: PN25 Water Valve, PN16 Water Valve, GGG50 lug butterfly valves



More Images



for more products please visit us on piping-industry.com

Product Description

Ductile Iron GG25 GGG40 GGG50 Lug Butterfly Valves For PN10 PN16 PN25

Series No. BFV-1005

A butterfly valve, also known as a flap valve, is a simple structure regulating valve that can be used for switch control of low-pressure pipeline media. The butterfly valve refers to a valve with a disc as the closing component (valve disc or butterfly plate) that rotates around the valve axis to achieve opening and closing.

Butterfly Valves can be used to control the flow of various types of fluids such as air, water, steam, various corrosive media, mud, oil products, liquid metals, and radioactive media. Mainly used for cutting and throttling on pipelines. The butterfly valve opening and closing part is a disc shaped butterfly plate that rotates around its own axis within the valve body to achieve the purpose of opening, closing or adjusting.

Quick Detail

Design standard: API 609.
 Body material: DUCTILE IRON ASTM A536
 Nominal diameter: DN40 to DN1200 (1-1/2"—48").
 Pressure: CL150 (PN20) 150PSI 225PSI, 285PSI, PN6/PN10/PN16, J15K/JIS10K
 End connection: Wafer, LUG
 Face to face: EN558 Series 20
 Top flange ISO5211.
 Bi-direction Seal, Renewable seat Design
 Mode of operation: Lever
 Test and inspection: API 598. EN1226
 Epoxy Powder Coated inside and outside Min. 250 microns.

Product Range

Available Body Material: Ductile Iron , Carbon steel, Stainless steel, Alloy steel.
 Available Disc Material: Ductile iron, SS304, SS316, Bronze, Duplex SS2205/2507, UNS31803/UNS32750
 Optional Seat: EPDM, NBR, PTFE, Teflon. Neoprene
 Optional End connection: Wafer, Lug, Flanged.
 Optional Body Design: Eccentric or Concentric centerline
 Face to face: EN558 Series 13/14, long type or short type
 Normal diameter: 4"~96" (DN100~DN2400).
 Pressure range: 150lbs (PN10~PN25).
 Available Operation: Gearbox, Electric, pneumatic actuator
 Working temperature: -46 ~+200 .

Performance:

Ductile iron solid valve body, QT450-10 ductile iron valve body, tensile strength 450Mpa Min.

Highly elastic seat rubber

The rubber content of the valve seat rubber is 50%, and the simulation of opening and closing experiments is more than 10,000 times, without leakage

Aksu epoxy plastic powder

The valve body is sprayed with Akzo's epoxy resin powder Min. 250microns. with strong adhesion

Anti-blowing valve shaft design

The valve shaft of of the butterfly valve adopts the anti-blowing structure, which has excellent safety performance.

Install of the butterfly valve

Figure 1

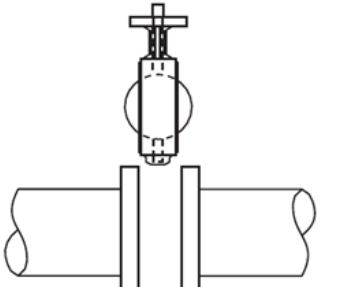
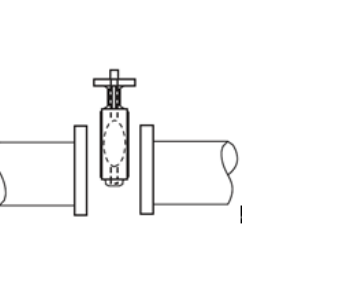
<p>Incorrect Disc opened beyond valve body face. Pipe flanges not spread sufficiently.</p>	<p>Disc positioned in the almost closed position. Pipe flange spread allows sufficient room for valve.</p>
	

Figure 2 Centering and Flanging of Valve

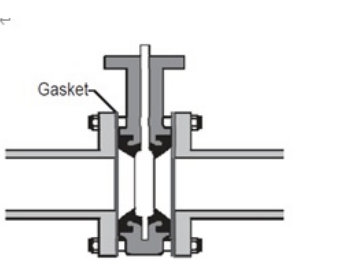
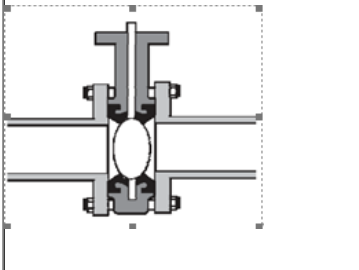
Disc in closed position Gaskets installed between valve and mating flanges	Correct No flange gaskets used. Disc in the "almost closed" position.
	

Figure 3.Flange Bolt Tightening Sequence

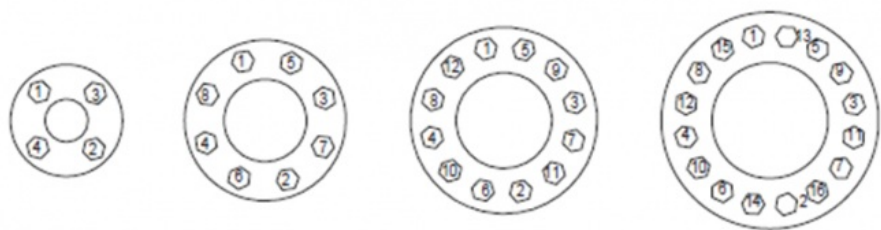
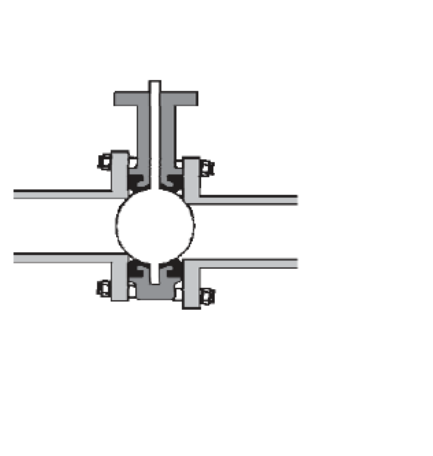
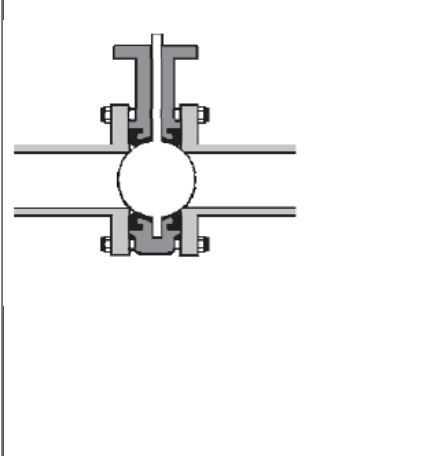


Figure 4-Final Valve Alignment and Tightening of Flange Bolts

Incorrect Pipe Flanges mis-aligned uneven torque applied to bolting.	Correct Piping aligned. Thread engagement even on both sides of valve.
	

Application:

widely used in gas, oil, water, chemical engineering and other related industries, also in cooling water systems of thermal power stations